
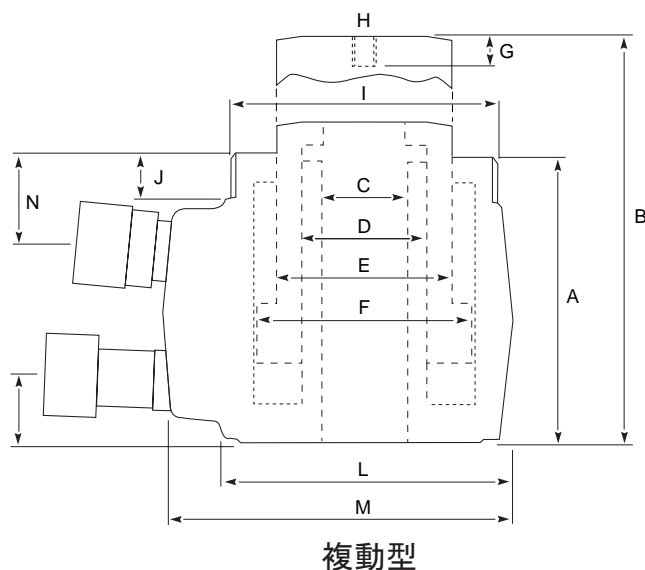


# Simson

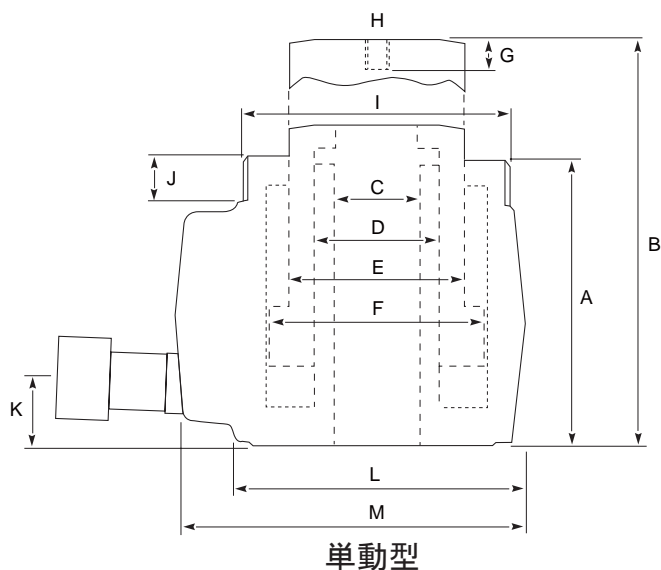

## 単動型

型番	容量		ストローク	断面積	油容量	寸法													重量
	ton	kN				mm	cm <sup>2</sup>	cm <sup>3</sup>	A	B	C	D	E	F	G	H	I	J	
0830H	8	84	30	13.47	41	74	104	16.5	28	40	50	—	—	—	—	25	70	94	2.7
0830HG	8	84	30	13.47	41	85	115	14.0	28	40	50	20	M16	—	—	25	70	94	2.8
0880H	8	84	80	13.47	108	130	210	20.5	30	40	50	—	—	M70x3	45	25	70	94	4.1
0880HG	8	84	80	13.47	108	140	220	17.5	30	40	50	25	M20	M70x3	45	25	70	94	4.2
1330	13	137	30	19.63	59	74	104	—	—	40	50	25	M12	—	—	25	70	94	2.8
1375	13	137	75	19.63	148	130	205	—	—	30	50	20	M8	M70x3	45	25	70	94	3.9
2025H	20	198	25	28.30	71	79	104	24.5	36	60	70	—	—	M90x3	14	25	98	119	4.5
2025HG	20	198	25	28.30	71	109	134	21.0	36	60	70	35	M24	M90x3	14	25	98	119	4.6
2530	25	259	30	38.48	116	79	109	—	—	40	70	25	M12	M90x3	14	25	98	119	4.4

## 複動型

型番	呼称容量	容量		ストローク	断面積	油容量	寸法													重量	
		押し	引き				A	B	C	D	E	F	G	H	I	J	K	L	M		N
1875H	18	197	111	75	28.27	212	130	205	30.5	45	60	75	—	—	M90x3	20	30	105	130	45	7.5
1875HG	18	197	111	75	28.27	212	172	247	26.5	45	60	75	50	M30	M90x3	20	30	105	130	45	7.6
3075	30	309	111	75	44.17	332	130	205	—	—	60	75	35	M16	M90x3	20	30	105	130	45	8.1
3755H	37	383	198	55	54.79	302	130	185	40.5	55	80	100	—	—	M120x3	20	30	135	155	40	11.4
3755HG	37	383	198	55	54.79	302	177	232	35.0	55	80	100	60	M39	M120x3	20	30	135	155	40	11.6
5355	53	549	198	55	78.54	432	130	185	—	—	80	100	35	M16	M120x3	20	30	135	155	40	13.0
10050H	100	1011	771	50	144.51	723	134	184	56.0	75	100	155	—	—	M200x4	25	35	210	225	50	27.3
1355	135	1320	771	50	188.68	944	134	184	—	—	100	155	35	M16	M200x4	25	35	210	225	50	31.1